


Baskın Sınıfı / Pressure Rating		PN 16			
Baskın Bar / Pressure in Bars		16	15	14	13
Max.Sıcaklık °C / Max.Temp.in °C		120	180	200	250
Min.Sıcaklık °C / Min.Temp.in °C		-60	-60	-60	-60

APPLICATIONS

- Hot water and cold water
- Superheated water
- Saturated steam, superheated steam
- Fluid excluding acid

PARÇA ADI / PART NAME	DN	MALZEME ÖZELLİKLERİ / MATERIALS	
		15...100	125 / 150 / 200
GÖVDE BODY		DÖVME PİRİNÇ BRASS MESSING	GGG 50
KLAVUZ DISC GUIDE	SS		GGG 50
KLAPE DISC	SS		GGG 50
YAYLAR SPRINGS	SS		SS

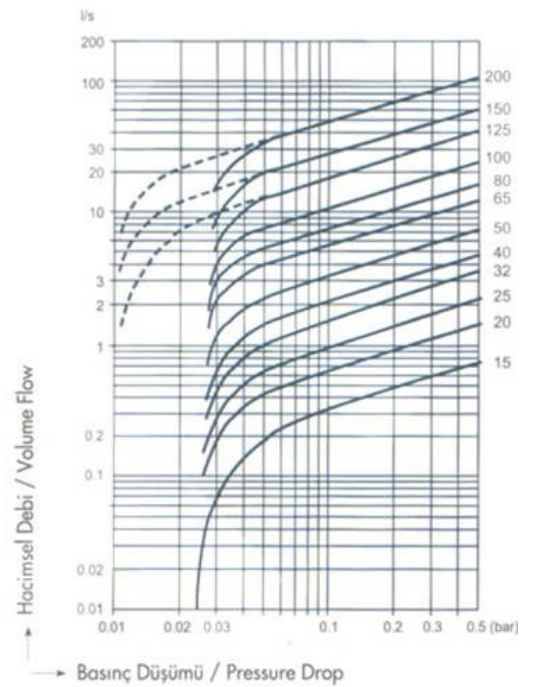

ANMA ÇAPı NOMINAL DIAMETER		DN	15	20	25	32	40	50	65	80	100	125	150	200
MIN. AÇMA BASINCI (mbar) MIN. OPENING PRESSURE	Yaylı With Spring	Akış Yönü / Flow Direction	↔	21										
			↑	17	18.3	16.3	16.2	16.1	15	13.7	12.5	12	13	14.5
	Yaysız Without Spring	↓	23			24	25	26	26.5	30	32.5	35		
		↑	2.6	3.9	4	4.2	5.1	5.6	7.4	15	17	18.5		

Anma Çapı Nominal Diameter	DN	15	20	25	32	40	50	65	80	100	125	150	200
Vana Boyutları Valve Dimensions DIN 3202 / 3-K4	ØD	40	47	56	72	82	95	115	132	152	184	209	264
	Ød	15	20	25	31.5	39	48	64	74	89	112	132	175
	L	16	19	22	28	32	40	46	50	60	90	106	140
Ağırlık / Weight	Kg.	0,094	0.134	0.202	0.458	0.620	0.976	1.360	2.078	3.030	6.80	10.00	20.00